

LEVELtrol II

Multi-Function Level Indicator, Controller and Batcher

Features

- Level and Tank Volume/Mass Indicator
- Batching by Level
- Level Control, Tank Volume, Corrected Volume and Mass Calculations
- Menu Selectable Hardware & Software Features
- Two Line LCD or VFD Display
- Isolated Outputs Standard
- RS-232 Port Standard, RS-485 Optional
- Windows™ Setup Software
- DIN Enclosure with Two Piece Connectors
- DDE Server & HMI Software Available
- NEW! - Attractive Wall Mount Enclosure

Description:

The LEVELtrol II Flow Computer satisfies the instrument requirements for a variety of level sensor types in liquid applications. Multiple tank geometries, fluid equations and instrument functions are available in a single unit with many advanced features.

The alphanumeric display shows measured and calculated parameters in easy to understand format. Single key direct access to measurements and display scrolling are supported

The versatility of the LEVELtrol II permits a wide measure of versatility within the instrument package. The various hardware inputs and outputs can be "soft" assigned to meet a variety of common application needs. The user "soft selects" the usage of each input/output while configuring the instrument. Consider the following illustrative examples.

The isolated analog output can be chosen to follow level, tank volume, corrected tank volume, tank mass, temperature, or density by means of a menu selection. Most hardware features are assignable by this method.

The user can assign the standard RS-232 Serial Port for data logging, transaction printing, or for connection to a modem for remote meter reading. Setup software is supplied for easy programming and monitoring using a PC

Specifications:

Environmental

Operating Temperature: 0°C to +50°C
Storage Temperature: -40°C to +85° C
Humidity : 0-95% Non-condensing
Materials: U.L. approved

Listing: UL/C-UL Listed (File No. E192404), CE Compliant

Display

Type: 2 lines of 20 characters
Types: Backlit LCD and VFD ordering options
Character Size: 0.3" nominal
User programmable label descriptors and units of measure

Keypad

Keypad Type: Membrane Keypad
Number of keys: 16

Enclosure

Style: See Ordering Code for Available Mounting Options
Size: See Dimensions
Depth behind panel: 6.5" including mating connector
Type: DIN
Materials: Plastic, UL94V-0, Flame retardant
Bezel: Textured per matt finish



Power Input

The factory equipped power option is internally fused. An internal line to line filter capacitor and MOV are provided for added transient suppression.

110 VAC Power Option: 85 to 127 Vrms, 50/60 Hz

220 VAC Power Option: 170 to 276 Vrms, 50/60 Hz

DC Power Option:

12 VDC (10 to 14 VDC)

24 VDC (14 to 28 VDC)

Power Consumption

AC Power: 11.0 V/A (11W)

DC Power: 300 mA max.

Level Inputs:

Analog Input:

Accuracy: 0.01% FS at 20° C

Ranges

Voltage: 0-10 VDC, 0-5 VDC, 1-5 VDC

Current: 4-20 mA, 0-20 mA

Basic Measurement Resolution: 16 bit

Update Rate: 4 updates/sec

Automatic Fault detection: Signal over/under-range,
Current Loop Broken

Calibration: Software Calibration (no trimmers) and Auto-zero
Continuously

Extended calibration:

Learns Zero and Full Scale of each range using special test mode.

Sensor Types Supported:

Differential Pressure, Ultrasonic, Many Others

Tank Geometries:

Horizontal, vertical, spherical and 32 point strapping table

Auxiliary / Compensation Input

The auxiliary/compensation input is menu selectable for temperature, density or not used. This input is used for the compensated input when performing compensated tank volume and mass calculations. It can also be used as a general purpose input for display and alarming.

Available Input Ranges

Voltage: 0-10 VDC, 0-5 VDC, 1-5 VDC

Current: 4-20 mA, 0-20 mA

Resistance: 100 Ohms DIN RTD

Control Inputs

Switch Inputs are menu selectable for Start, Stop, Reset, Lock, Alarm Acknowledge, Print or Not Used.

Relay Outputs

The relay outputs are menu assignable to Level, Tank Volume, Temperature, Density, Batch Control or Malfunction
 Number of relays: 2 (4 optional)
 Contact Ratings: 5 amp, 240 VAC or 30 VDC

Isolated Analog Output

The analog output is menu assignable to correspond to the Level, Tank Volume/Mass, Temperature or Density.
 Type: Isolated 4-20 mA Current Sourcing

Excitation Voltage (AC powered units only)

24 VDC @ 100 mA (fault protected)

Isolated Pulse output

The isolated pulse output is menu assignable to generate pulse outputs when tank fills, empties or both.
 Pulse Output Form: Isolated Photomos Relay
 Maximum On Current: 25 mA
 Maximum Off Voltage: 30 VDC
 Pulse Duration: 10 msec or 100 msec

Serial Communication

The serial port can be used for printing, datalogging, modem connection and communication with a computer. Windows setup software is included for easy programming using a PC.

RS-232:

Device ID: 01-99
 Baud Rates: 300, 600, 1200, 2400, 4800, 9600, 19200
 Parity: None, Odd, Even
 Handshaking: None, Software, Hardware
 Print Setup: Configurable print list and formatting

RS-485: (coming soon)

Device ID: 01-247
 Baud Rates: 300, 600, 1200, 2400, 4800, 9600, 19200
 Parity: None, Odd, Even
 Protocol: Modbus RTU (Half Duplex)

Real Time Clock

LEVELtrol II is equipped with a battery backed real time clock with display of time and date.

Format:

12 or 24 hour time display
 Day, Month, Year date display

Fig. 1: Standard Dimensions


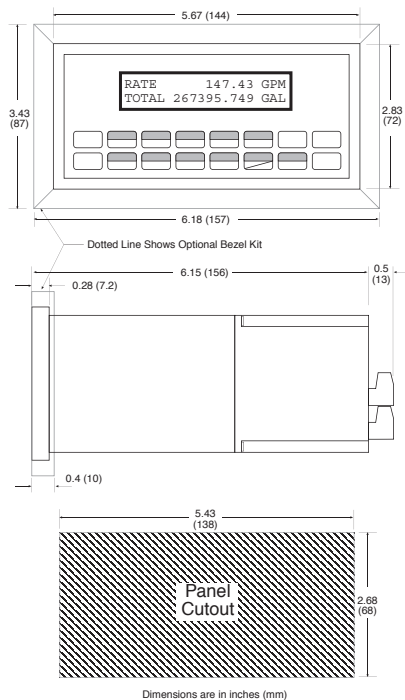


Fig. 2: Wall Mount ("W" mounting option) Dimensions

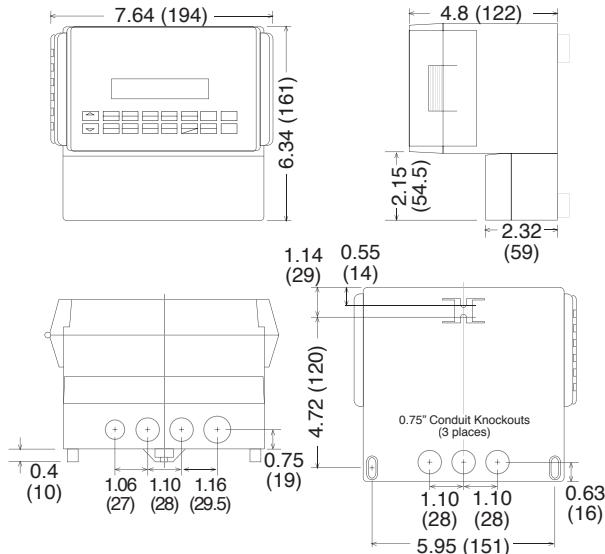

Terminal Designations:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
DC OUTPUT	Vin +	lin +	COMMON	RTD EXCIT +	RTD SENS +	RTD SENS -	CNTR IN 1	CNTR IN 2	CNTR IN 3	COMMON	PULSE OUTPUT +	PULSE OUTPUT -	ANALOG OUTPUT +	ANALOG OUTPUT -	4-20 mA	NC	COM RLY1	COM RLY2	COM RLY3	COM RLY4	POWER IN	DC +	DC -
																25	26	27	28	29	30		
																NC	NO	NO	NC	NO	NO		

Ordering Information

Example LT2 L 1 B 0 P

Series: LT2 = LEVELtrol II

Display Type: L = LCD, V = VFD

Input Type: 1 = 110 VAC, 2 = 220 VAC, 3 = 12 VDC (10 to 14 VDC), 4 = 24 VDC (14 to 28 VDC)

Relays: A = 2 SPDT Relays, B = 4 SPDT Relays

Network Card: 0 = None (STD), 2 = RS485/Modbus (available soon) (optional 2nd COM port)

Mounting: P = Panel Mount (see Fig. 1), N = NEMA 4 Wall Mount (see NEMAtrolST4X), W = NEMA 12/13 Wall Mount w/ Clear Cover (see Fig.2), E = Explosion Proof (No Button Access) (see XHVD 7/4), X = Explosion Proof (with Button Access) (see XTROL 7/4)

Options: ET = Extended Temperature (-4°F to 131°F (-20°C to 55°C)), IM = Internal Modem, M = Modem Power Option

Accessories: KEPS-KEP1-32 = KEP RS232 for SUPERtrol 1, SUPERtrol 1LE, SUPERtrol 2 and LEVELtrol 2 • 32 Bit DDE Server
 Modem Available, see MPP-2400N (requires M option)
 Serial printer available, see P1000, P295
 Ethernet Port Server available, see IEPS
 RS-422/485 to RS-232 Communication Adaptor available, see CA285
 Remote metering and data collection software available, see TROLlink